


NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY



IMPORTANT: PLEASE READ THROUGH ALL THE ASSEMBLY GUIDE BEFORE CHOOSING YOUR BUILD OPTIONS AS SOME MODELS SHARE COMPONENTS

FERIK COMMAND SKIFF AND MUSHIR ESCORT SKIFF BODY BUILD

PARTS CAN BE FOUND AS RESIN

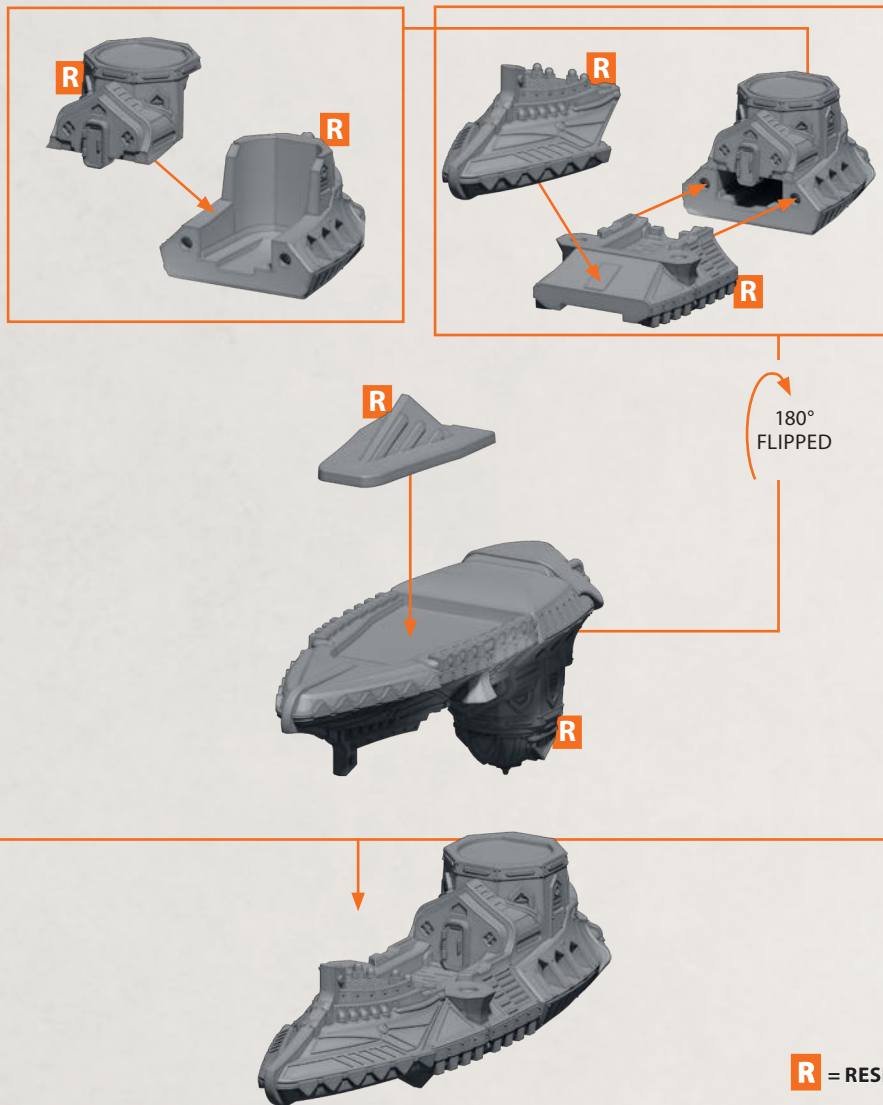

NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY




OFFICER FLAGS

FLAG PARTS CAN BE FOUND ACROSS **VARIOUS ARMoured CLASH SPRUES** AND THE **BASES SPRUE**

THERE ARE VARIOUS FLAG OPTIONS ACROSS **ARMoured CLASH SPRUES** USED TO DEFINE LEADER MODELS WITHIN UNITS

ARMoured CLASH SPRUES WILL CONTAIN VARIOUS OPTIONS FOR THE OFFICER'S FLAG, THESE CAN BE APPLIED TO A SUITABLE AREA ON ANY MODEL NOT SITUATED ON A BASE

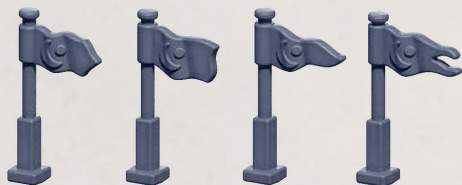


ON THE **BASES** SPRUE YOU WILL FIND A PENNANT FLAG AND BASE THAT INCLUDES A PORT FOR IT



THIS PARTICULAR COMBINATION CAN BE USED WITH UNITS TO DEFINE A MODEL THAT CONTAINS AS AN OFFICER (PARTICULARLY WITH FIGURES SETS THAT DO NOT CONTAIN A FLAG BEARER)



PORT





NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY



PILLAR OF LIGHT HOVER TANK BODY BUILD

PARTS CAN BE FOUND ON THE **ARMOURED REGIMENT** SPRUES

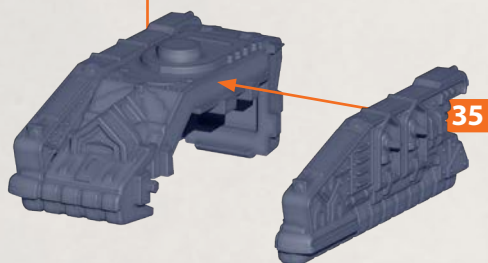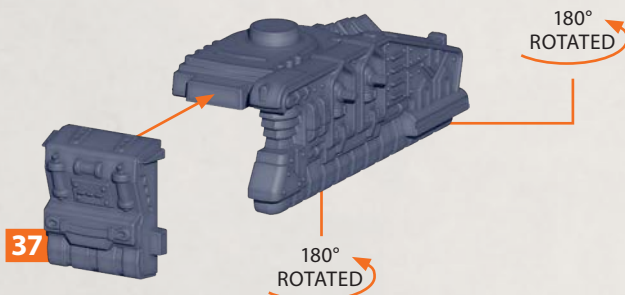


NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY




PILLAR OF LIGHT HOVER TANK CONTINUED

PARTS CAN BE FOUND ON THE **ARMOURED REGIMENT** SPRUES

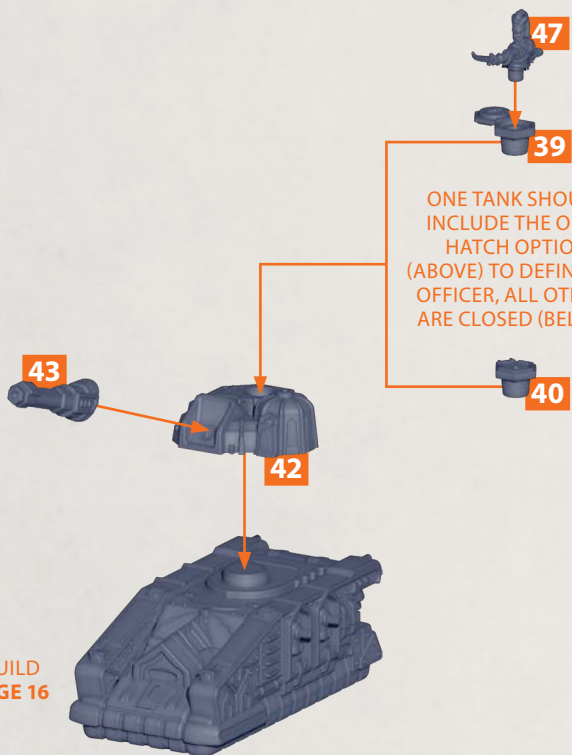

ONE TANK SHOULD INCLUDE THE OPEN HATCH OPTION (ABOVE) TO DEFINE THE OFFICER, ALL OTHERS ARE CLOSED (BELOW)

FOR BUILD SEE PAGE 16

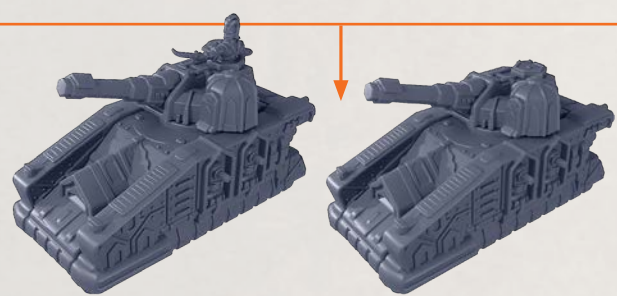




EXAMPLES SHOWING BOTH THE OFFICER (LEFT) AND STANDARD MODELS (RIGHT)

NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY



HAYALET HOVER TANK BODY BUILD

PARTS CAN BE FOUND ON THE **ARMOURED REGIMENT** SPRUES

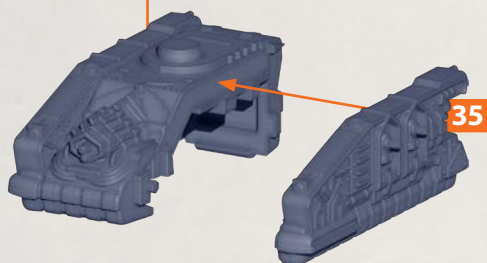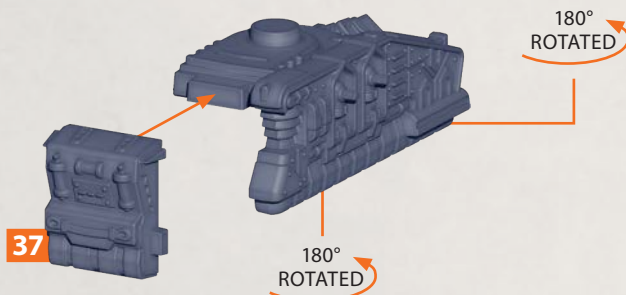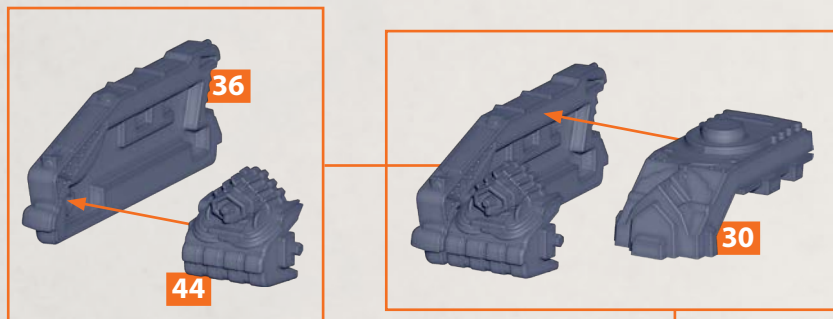

NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY



HAYALET HOVER TANK CONTINUED

PARTS CAN BE FOUND ON THE **ARMOURED REGIMENT** SPRUES



47



39

ONE TANK SHOULD INCLUDE THE OPEN HATCH OPTION (ABOVE) TO DEFINE THE OFFICER, ALL OTHERS ARE CLOSED (BELOW)



40

45



FOR BUILD SEE **PAGE 18**





EXAMPLES SHOWING BOTH THE OFFICER (LEFT) AND STANDARD MODELS (RIGHT)

NOTE: RINSE SPRUES IN WARM SOAPOY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY




SIPAHİ MONOWHEEL

PARTS CAN BE FOUND ON THE ARMOURÉD REGIMENT SPRUES

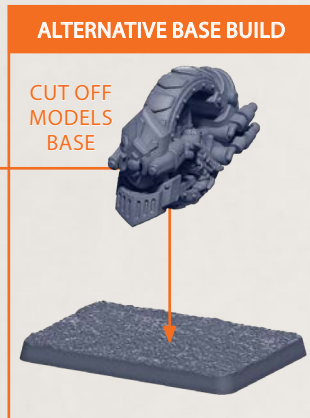
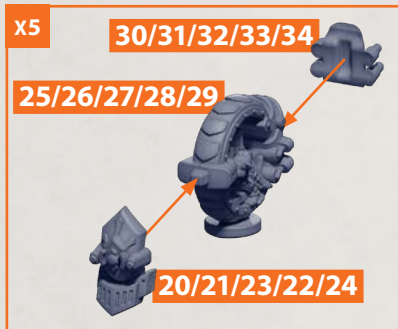


BLANK STANDS CAN BE ADDED TO BASES TO FILL SPACES NOT OCCUPIED BY A MONOWHEEL



EXAMPLES SHOWING BOTH THE OFFICER (LEFT) AND STANDARD MODELS (RIGHT)

THE OFFICER BASE CAN BE PLACED ON A **PENNANT FLAG BASE** OR HAVE A **FLAG ATTACHED** (SEE PAGE 4) IN ORDER TO FURTHER DEFINE THE MODEL AS AN OFFICER

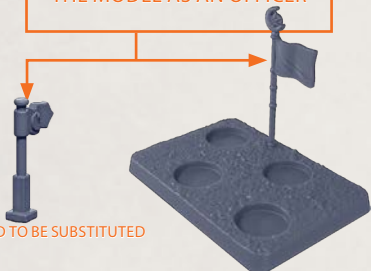

*IF USING THE OFFICER FROM A SPRUE THEN ONE OF THE STANDARD SIPAHİ WILL NEED TO BE SUBSTITUTED

NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY



COR CAROLI NYX

PARTS CAN BE FOUND ON THE ARMoured REGIMENT SPRUES

01

NOTE: ONE MODEL MUST INCLUDE THE OFFICER (PART 01)



02



04



06



08



ANY COMBINATION OF THE NYX CAN BE ADDED TO THE STANDARD BASES

10




12



14




16



EXAMPLES SHOWING BOTH THE OFFICER (LEFT) AND STANDARD MODELS (RIGHT)

THE OFFICER BASE CAN BE PLACED ON A **PENNANT FLAG BASE** OR **HAVE A FLAG ATTACHED (SEE PAGE 4)** IN ORDER TO FURTHER DEFINE THE MODEL AS AN OFFICER



*IF USING THE OFFICER FROM A SPRUE THEN ONE OF THE STANDARD COR CAROLI WILL NEED TO BE SUBSTITUTED

NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY



COR CAROLI LUMINANT

PARTS CAN BE FOUND ON THE **ARMOURED REGIMENT** SPRUES



46

NOTE: ONE MODEL MUST INCLUDE THE OFFICER (PART 46)



03



05



09



07

ANY COMBINATION OF THE LUMINANT CAN BE ADDED TO THE STANDARD BASES



11




13




15



17



THE OFFICER BASE CAN BE PLACED ON A **PENNANT FLAG BASE** OR **HAVE A FLAG ATTACHED (SEE PAGE 4)** IN ORDER TO FURTHER DEFINE THE MODEL AS AN OFFICER




*IF USING THE OFFICER FROM A SPRUE THEN ONE OF THE STANDARD COR CAROLI WILL NEED TO BE SUBSTITUTED

NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY



KHEPRI, SENEHEM & AOPHIS ROTOR AUTOMATA BODY ASSEMBLY

PARTS CAN BE FOUND ON THE **ARMOURED REGIMENT** SPRUES

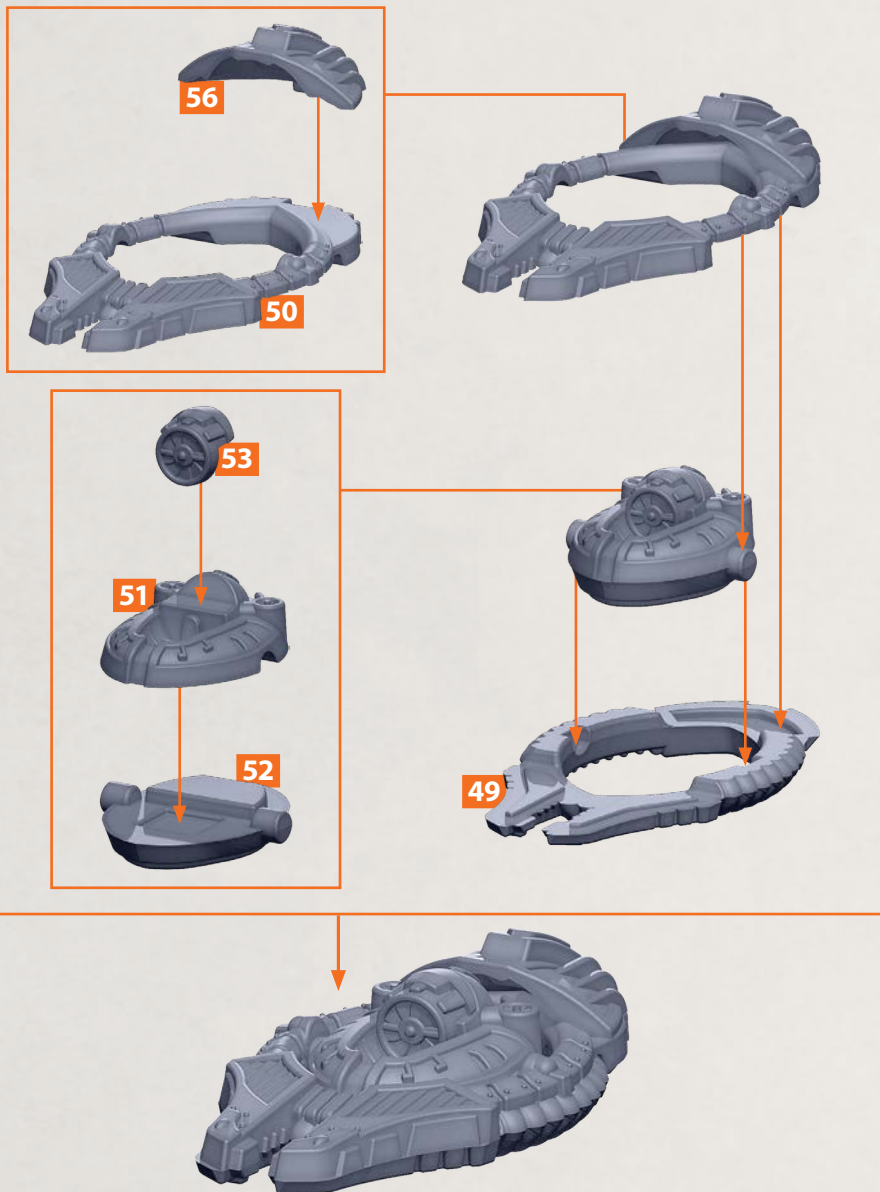


NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY



KHEPRI ROTOR AUTOMATA

PARTS CAN BE FOUND ON THE **ARMOURED REGIMENT** SPRUES

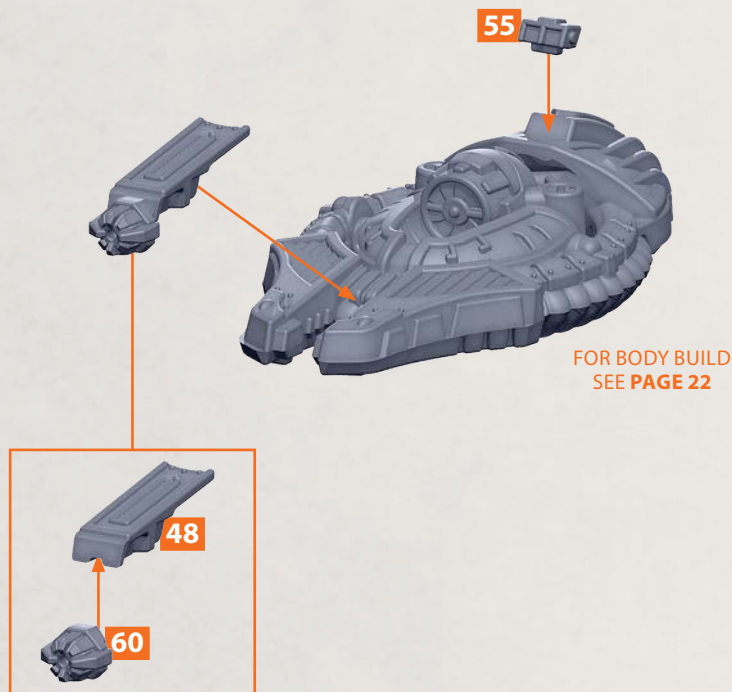

FOR BODY BUILD
SEE **PAGE 22**



NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY



SENEHEM ROTOR AUTOMATA

PARTS CAN BE FOUND ON THE **ARMOURED REGIMENT** SPRUES




NOTE: RINSE SPRUES IN WARM SOAPY WATER TO REMOVE ANY MOULD RELEASE BEFORE ASSEMBLY



APOPHTIS ROTOR AUTOMATA

PARTS CAN BE FOUND ON THE **ARMOURD REGIMENT** SPRUES

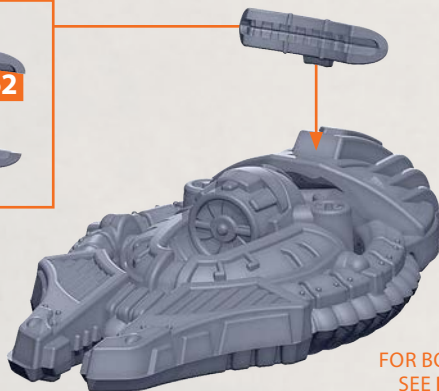

FOR BODY BUILD
SEE **PAGE 22**

